



Williams RF Works
 805-403-3666
sales@williamsRFworks.com



WR10 to 1mm Adapters



Model: TWR10-1mm-F

75 - 110 GHz Operation

- Low VSWR
- Robust Design
- Low Insertion Loss
- Field Replaceable Flange



Our waveguide to 1mm coaxial transitions have unsurpassed performance. Priced for general test and measurement use specified for metrology grade testing.

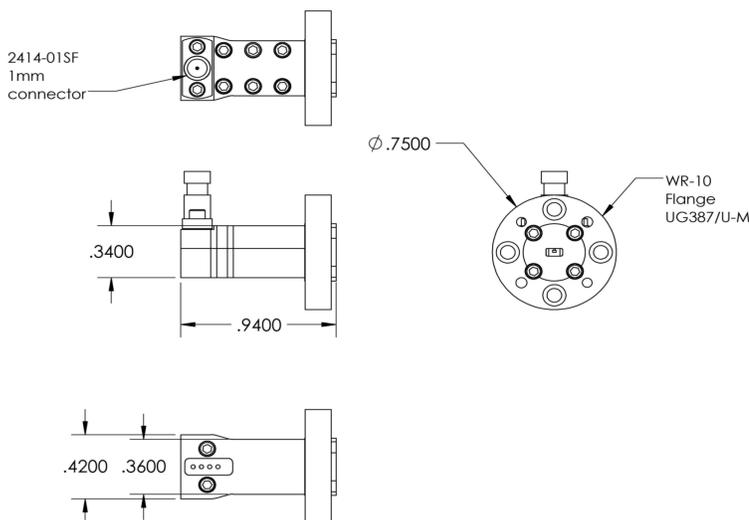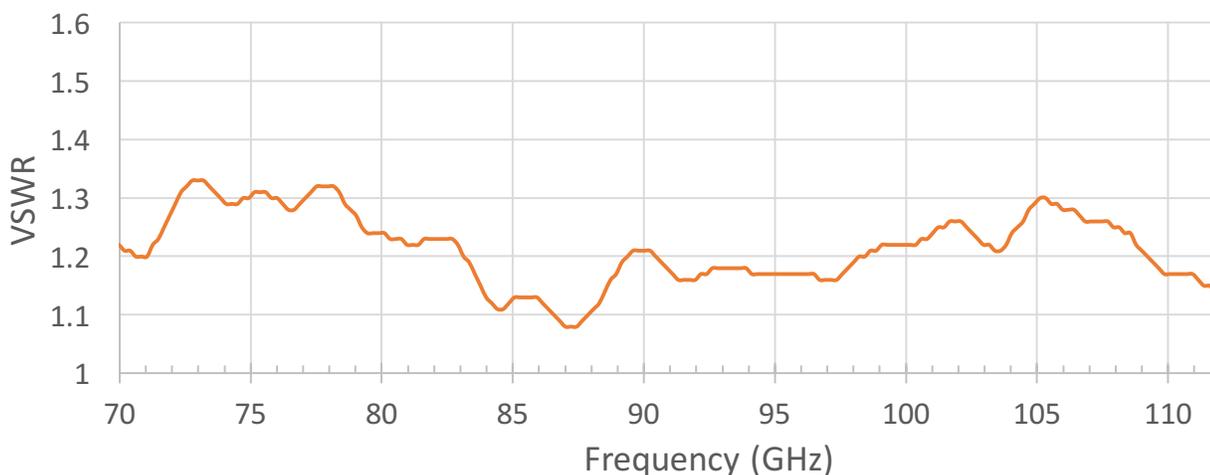

Parameter	Specification
Frequency:	75 - 110 GHz
VSWR:	1.4:1 Max
Insertion Loss:	0.75 Max
Max Power:	10 W (CW)
Coaxial:	1.0 mm Female
Waveguide:	WR-10 UG387/M
Material:	Gold Plated AL